PORTAFILL

PORTAFILL 4000T TECHNICAL SPECIFICATION

ROTARY SCREEN
- Removable Direct Drive Rotary Screen Drum
- 4200 (13'9") x 1500 (4'11")
- Variable Speed
- Throughput 80-100 m^3 per hour

FEEDER CONVEYOR
- 900mm (36") Wide Flat Belt
- Variable Speed
- Feeder Drive Sensitive to Drum Load

COLLECTION CONVEYOR
- 1200mm Wide Flat Belt

OVERSIZE CONVEYOR
- 1000mm (40") Wide Chevron Conveyor with Side Skirting
- Discharge Height 3168mm (10'5")
- Variable Speed

FINES CONVEYOR
- 750mm (30") Wide Chevron Conveyor
- Discharge Height 3239mm (10'7")

HOPPER
- Hopper Volume 2.9m^3 (4.3m^3 heaped)
- Optional Hydraulically Tipping Grid with Remote Control
- Optional Vibrating Tipping Grid with Grizzly, Fingers or Mesh Screen

UNDERCARRIAGE
- Tracked undercarriage

POWER
- Deutz D2011 L04i (EU Stage IIIa Tier 4 Interim) Diesel
- 41Kw – 55HP
- 100Ltr Capacity Diesel Tank
- 380Ltr Hydraulic Tank

**All drawing dimensions approximate and in millimetres. Portafill International reserves the right to alter the specification of these machine without notice.*

PORTAFILL

Working Dimensions 4000T

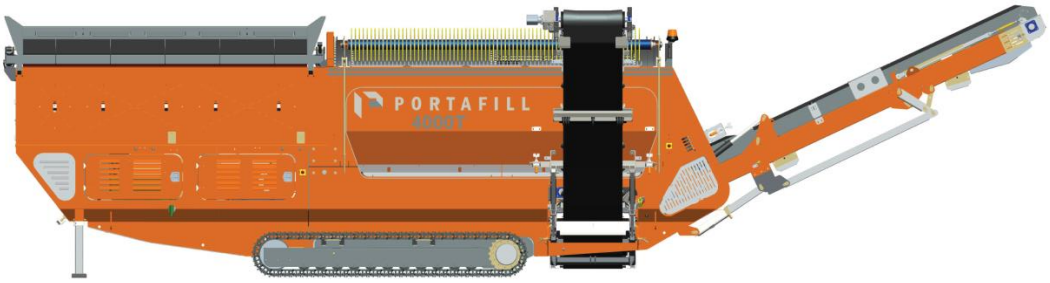

3168

13054

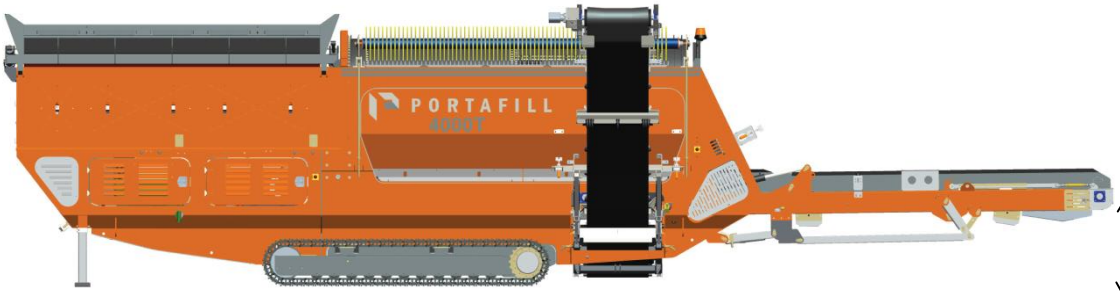

1115

13314

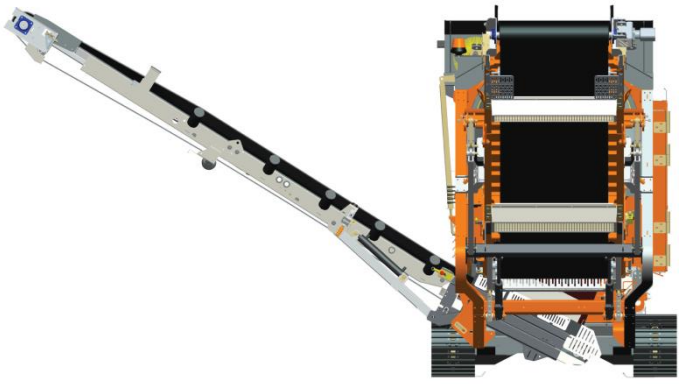

3239

3169

6223

**All drawing dimensions approximate and in millimetres. Portafill International reserves the right to alter the specification of these machine without notice.*

Transport Dimensions 4000T

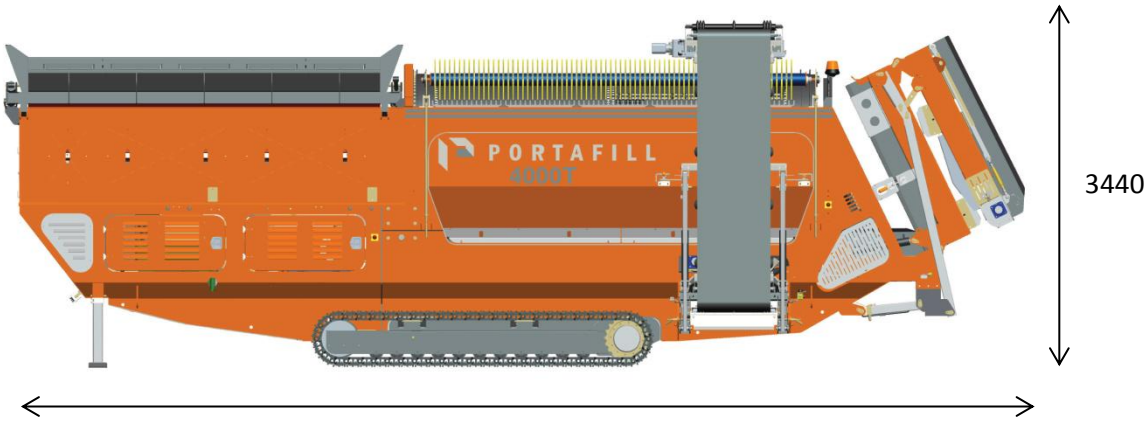

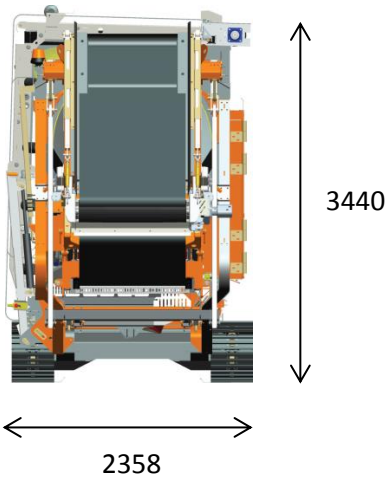

Transport Dimensions

- Transport Height 3440mm (11’3”)
- Transport Width 2358mm (7’8”)
- Transport Length 10295mm (33’9”)

Weight

- 14,300kgs (Approx.)

**All drawing dimensions approximate and in millimetres. Portafill International reserves the right to alter the specification of these machine without notice.*